

Central Vacuum Blower Motor – Ametek Lamb - 115334


Model: 115334 (7.2 in. 120 V 2-Stage)

SPECIFICATIONS

Motor Type : Series Universal
 Input Voltage : 120 VAC
 Frequency : 50/60 Hz
 Fan Diameter : 7.2 in.
 No. Fan Stages : 2
 Fan System Style : Bypass
 Air Discharge : Tangential
 Operating Temp : 32-104°F
 Bearing System : Ball/Ball
 Frame : Skeleton
 Brush Type : Carbon
 Inlet Tube Dia. : None
 RFI Choke : None
 Speed : 1

ADDITIONAL FEATURES

Regulatory : UL Recognized, CSA certified
 Comm Bracket : Aluminum
 Fan Bracket : Aluminum
 Therm Protect : None
 Insulation Class : Class A
 Added Bearing Prot. :
 Fan Shell Coat : None
 Electrical Conn. : Lead Wires
 Duty Cycle : Intermittent
 Special Feature :

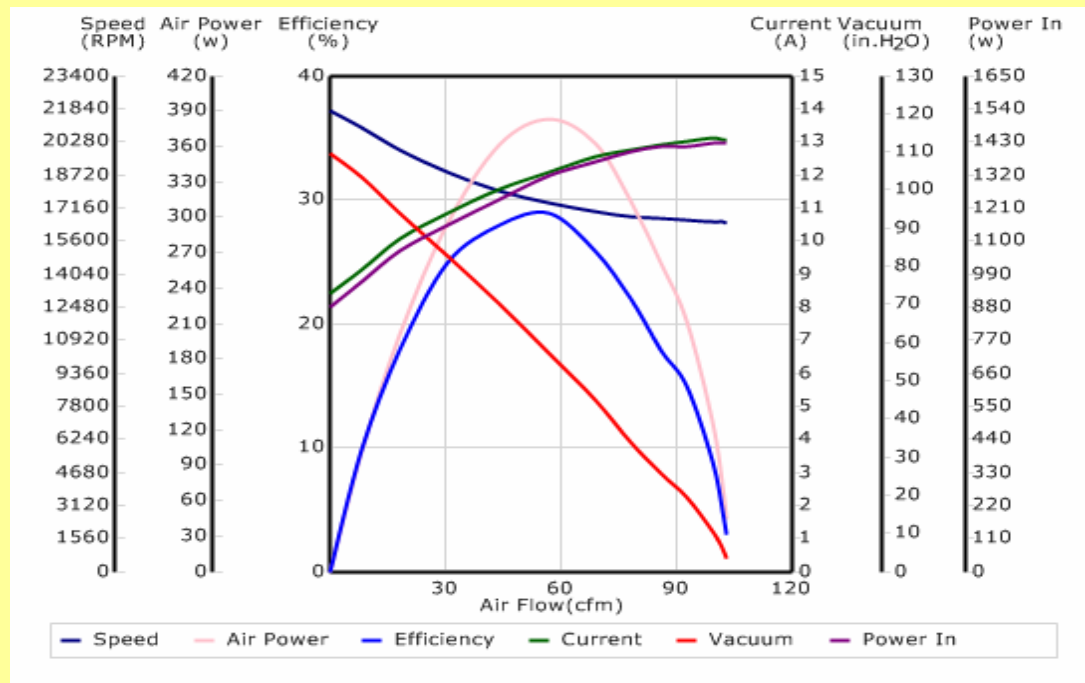

Orifice (In.)	Current (A)	Input Power (W)	Speed (RPM)	Vacuum (in. H ₂ O)	Air Flow (CFM)	Air Power (Watts)	Effic (%)
2.000	13.00	1440	16475	003.7	102.7	45	3
1.750	13.00	1440	16575	006.2	101.8	74	5
1.500	13.00	1444	16575	010.9	099.2	127	9
1.250	12.90	1436	16625	019.6	092.4	213	15
1.125	12.90	1420	16700	025.9	086.0	262	18
1.000	12.70	1408	16775	034.2	078.1	314	22
0.875	12.40	1380	17025	045.1	068.6	364	26
0.750	12.00	1332	17400	057.4	056.9	384	29
0.625	11.30	1272	18000	070.4	043.8	362	28
0.500	10.50	1192	18850	082.9	030.4	296	25
0.375	09.70	1112	19900	094.1	018.2	201	18
0.250	08.80	1008	20950	103.5	008.5	103	10
0.000	08.00	928	21800	110.0	000.0	0	0